


Dancing Geese Quilt

Assembly Diagram

Designed by Fran Morgan
 Finished Size: 41 3/4" x 53 3/4"

Fabric	Yardage
3 coordinating fabrics	3, 1 yd cuts
Backing Fabric	3 yds.
<i>Chenille By The Inch</i> [®]	
Color	Amount
Color of choice	200"
Other Materials	
Twin-size cotton batting	
Sewing thread to match fabric; invisible quilting thread	
<i>Chenille Brush</i> [™] & <i>Chenille Cutting Guide</i> [™]	
Spray bottle with water & fabric softener	

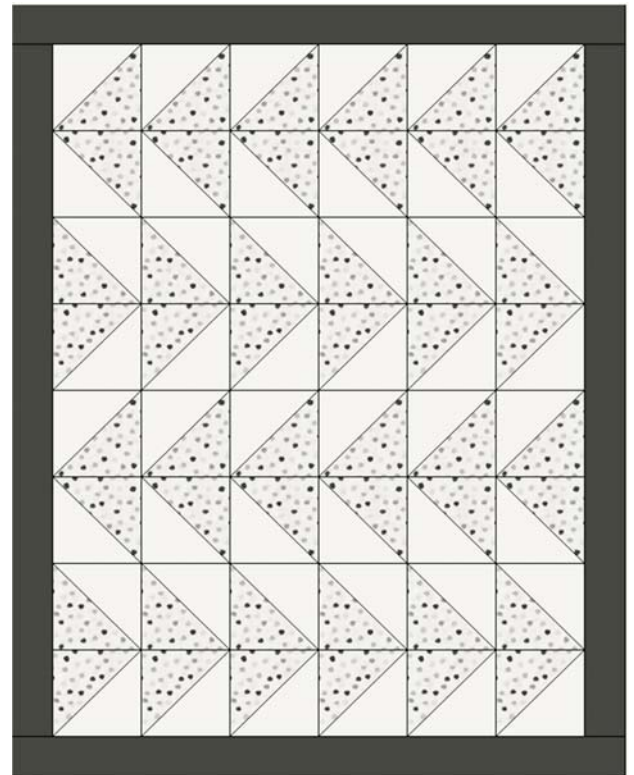

Note: WOF means “width of fabric.” Seam allowance is 1/4" throughout.

Cutting

From fabric #1:
 24, 7" x 7" blocks

From fabric #2:
 24, 7" x 7" blocks

From fabric #3:
 6, 3 1/2" x WOF for border
 5, 1 1/2" x WOF for binding

From Backing Fabric:
 54" x WOF

Step 1

Cut the 7" x 7" squares corner to corner to make 48 half square triangles. With right sides together, sew one fabric #1 and one fabric #2 triangle together along long edge, press seams open. Trim blocks to 6 1/2". Assemble quilt top by sewing eight rows of six blocks each, rotating blocks as shown

in Assembly Diagram, press seams open. Sew rows together, press seams open.

Step 2

Sew two, 3 1/2" x WOF strips together end to end. Make 2. Sew one strip to each side of quilt top trimming ends even with top and bottom. Sew one, 3 1/2" x WOF strip to each top and bottom, trim ends even with sides.

Step 3

Layering top batting and backing together, pin baste in place. Quilt as desired. Trim edges even with quilt top. For binding sew 1 1/2" x WOF binding strips together end to end. Press strip in half, wrong side together and matching raw edges. Press both raw edges into center fold. With right sides together and matching raw edges, sew binding to quilt, mitering corners. Press to wrong side, hand stitch in place.

Step 4

Remove tear-away backing from *Chenille By The Inch*[®]. Using the *Chenille Cutting Guide*[™], and cutting between the stitched lines with a rotary cutter, cut into

Fabric Selection Guide



strips. Sew *Chenille By the Inch*[®] on the border seams around the quilt, back tacking at beginning and end of each strip and overlapping ends when adding a new strip.

Step 5

Using a spray bottle with 3 or 4 drops of fabric softener added to 8 oz. of water, dampen sewn *Chenille By The Inch*[®] strips; using a *Chenille Brush*[™], brush vigorously to fluff chenille.

